


PCT/IL 03 / 00 161



מדינת ישראל
STATE OF ISRAEL

IL 03/00162
Rec'd PCT/PTO 03 SEP 2004

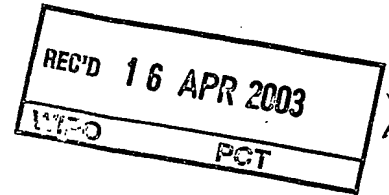

Ministry of Justice
Patent Office

משרד המשפטים
לשכת הפטנטים

This is to certify that
annexed hereto is a true
copy of the documents as
originally deposited with
the patent application
of which particulars are
specified on the first page
of the annex.

זאת לתעודה כי
רצופים בזה העתקים
נכונים של המסמכים
שהופקדו לכתחילה
עם הבקשה לפטנט
לפי הפרטים הרשומים
בעמוד הראשון של
הנספח.

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

This 27 -03- 2003 היום

רשם הפטנטים

Commissioner of Patents

נתאשר
Certified

לשימוש הלשכה
For Office Use

מספר: Number	48468
תאריך: Date	03-03-2002
הוקדם/נדחה Ante/Post-dates	

חוק הפטנטים, התשכ"ז -- 1967
PATENTS LAW, 5727-1967

בקשה לפטנט

Application for Patent

C:43978

אני, (שם המבקש, מענו - ולגבי גוף מאוגד -- מקום התאגדותו)
I (Name and address of applicant, and, in case of body corporate-place of incorporation)

ORIDION BREATH ID LTD.

Hamarpe 7

Jerusalem 97774

(An Israeli Company)

אורידיון ברת אי די בע"מ

המרפא 7

ירושלים 97774

(חברה ישראלית)

ששמה הוא By Law

Owner, by virtue of

בעל אמצאה מכח הדין

of an invention, the title of which is:

מערכת לאיסוף נשימות

(בעברית)

(Hebrew)

BREATH COLLECTION SYSTEM

(באנגלית)

(English)

hereby apply for a patent to be granted to me in respect thereof

מבקש בזאת כי ינתן לי עליה פטנט

*בקשה חלוקה - Application for Division		*דרישה דין קדימה Priority Claim		
*בקשת פטנט מוסף - Application for Patent of Addition		מספר סימן Number/Mark	תאריך Date	מדינת האיגוד Convention Country
מבקשת פטנט from Application				
מס. No. _____ dated _____ יום				
מבקשת פטנט/לפטנט *לבקשה/לפטנט to Patent/Appl.				
מס. No. _____ dated _____ מיום				
רצוף בזה / עוד יוגש - *יפוי כח: כלל/מיוחד P.O.A.: general / individual - attached / to be filed later - הוגש בענין _____ filed in case				
המען למסירת הודעות ומסמכים בישראל Address for Service in Israel				
Sanford T. Colb & Co. P.O.B. 2273 Rehovot 76122				

For the Applicant,

חתימת המבקש
Signature of Applicant

Sanford T. Colb & Co.
C:43978

היום 3 בחודש March שנת 2002
This of the year

לשימוש הלשכה
For Office Use

טופס זה, כשהוא מוטבע בחותם לשכת הפטנטים ומושלם בספר ובתאריך ההגשה, הינו אישור להגשת הבקשה שפרטיה רשומים לעיל.
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application, the particulars of which are set out above.

* מחק את המיותר Delete whatever is inapplicable

מערכת לאיסוף נשימות

BREATH COLLECTION SYSTEM

ORIDION BREATH ID LTD.
C: 43978

אורידיון ברת אי די בע"מ

BREATH COLLECTION SYSTEM

FIELD OF THE INVENTION

The present invention relates to the field of breath tests and methods of collecting the breath samples for remote analysis, and especially for use in breath tests which take a long time to complete or require special treatment of the sampled gases.

BACKGROUND OF THE INVENTION

A number of breath tests are known for use in diagnosing various clinical conditions in subjects. Many of these breath tests are comparatively quick, and give definitive results within a matter of a few minutes or at most, tens of minutes. When a real-time breath tester is used, such as the Breath ID TM supplied by Oridion Medical Ltd., of Jerusalem, Israel, such quick breath tests are generally performed by keeping the subject connected to the breath tester, and sampling breaths directly into the breath tester at predetermined intervals, until the result is determined. If an off-line breath analyzer is used, such breath tests are generally performed by collecting breaths at predetermined intervals in bags, and transferring them for later analysis to the off-line breath analyzer. Such off-line breath tests inevitably mandate a longer test period since the ongoing result of the test is not known in real time, and samples should generally be collected until it is certain that a definitive result is obtained.

Some breath tests however, such as that for determining oro-caecal transit time (OCTT), require a long time to complete the sampling process necessary to achieve a definitive result, and can last for up to approximately 6 hours. This may be problematic for a number of reasons. Furthermore, other breath tests require special collection conditions, which are not generally met by currently used

breath test procedures, whether on-line tests, or tests using analysis at a remote location.

Some of these problems can be summarized as:

- (i) Subject inconvenience of being connected to a breath testing instrument for such a long time;
- (ii) Poor utilization of the breath test instrument, which is generally an expensive piece of equipment, and it is not cost-effective for a single subject to monopolize a breath test instrument for several hours;
- (iii) In cases wherein breath samples have to be collected and sent to a laboratory, it causes staff inconvenience in dealing with very large number of samples, both in ensuring that the samples are taken, and at the correct times;
- (iv) In cases wherein breath samples have to be collected and sent to a remote laboratory, differences in the CO_2 content between the breath samples may introduce systematic errors in isotopic CO_2 measurement. Such changes may arise especially if the samples are manually taken without the use of a concentration regulating mechanism during the collection procedure, or if the subject to be analyzed does not exhale in a steady state condition throughout the test. Similar errors may also occur in other isotopically labeled breath samples.
- (v) Some breath tests require an absolute knowledge of the volume of exhaled CO_2 throughout the test, in addition to the isotope concentration of the species of carbon dioxide detected. Some examples of such breath tests are those for determining liver function or pancreatic function, in which the breath test analyzes exhaled products resulting from metabolic pathways through the organ being tested. For such tests, the conventional methods of assuming a constant volume according to the weight and height of the patient, according to the known Body Surface Area (BSA) parameter calculation may not be accurate due to physiological factors unrelated to the measurement. In other breath tests, it is not the absolute

volume that is required, but the change in absolute volume as the test proceeds. Since the volume is not necessarily directly related to the isotope concentration measured by the breath test, prior art breath tests do not always provide accurate results for such tests.

(vi) Some breath analysis procedures, such as those utilized in the analysis of volatile organic compounds (VOC), need special procedures for collecting and preparing the samples to prevent undesired sources of error. Such errors could arise from the presence of VOC's in the ambient gases, from the differences in normal metabolism rates between individuals, and from the presence of undesired factors affecting the samples, such as humidity. Current collection procedures do not generally fulfil these requirements.

There therefore exists an important need for a breath collection apparatus, particularly for use with breath tests which extend over long periods, which will overcome some of the above-mentioned disadvantages of present breath testing sample collection procedures.

The disclosures of all publications mentioned in this specification, are hereby incorporated by reference, each in its entirety.

SUMMARY OF THE INVENTION

The present invention seeks to provide a new breath collection system which obviates the need for the subject to remain attached to or close to a breath tester in the case of an on-line breath test, or close to a breath collection point in the hospital or clinic for off-line breath analysis procedures.

There is thus provided in accordance with a preferred embodiment of the present invention, an automatic, portable, breath sampling system, which is preferably carried by the subject, or otherwise kept with him or near him, for the recommended duration of the test. According to one preferred embodiment, the system collects samples at predetermined time intervals. According to another

preferred embodiment, the system collects samples in response to an automatic stimulus, which could be related to the breath content itself, or to another physiological signal, such as the subject's pulse rate, breath rate, blood pressure, or temperature. According to another preferred embodiment of the invention, preferably used to determine the effects of environmental hazards or pollution, the system collects samples in response to a signal related to an environmental effect, such as the presence of a strong concentration in the air of a foreign gas, which could be detected by an electro-chemical sensor.

If the prompting signal for sample collection is based on the breath content itself, that prompt may preferably be obtained from the output of a capnographic analyzer at the input to the collection system. The capnograph should preferably identify the sample as a breath sample before the commencement of collection, and should provide input signals to the gas collection system at the predetermined CO₂ level above which breath is to be collected. If another physiological signal is used to prompt breath collection, then an appropriate sensor must be provided, and its output interfaced with the breath collection system control.

According to another preferred embodiment of the present invention, the pneumatics and plumbing system used to collect the breath samples may be similar to those used in the intermediate chamber embodiments, described in the co-pending PCT application, International Publication No. WO 99/14576 for "Isotopic Gas Analyzer", hereby incorporate by reference in its entirety, whereby only a predetermined part of each relevant breath is collected. The whole collection procedure is preferably under control of a central controller.

According to another preferred embodiment of the present invention the capnograph output could be used to identify and differentiate alveolar breath, which has taken part in pulmonary gas exchange, from air originated from the subject's respiratory dead space or from the environmental air. This may also thus allow collection of air from the environment, or from the dead space when of interest. Thus, for instance, air from the environment would be sampled from the baseline region of the waveform, which is the inspiratory region where virtually

none of the subject's pulmonary exhaled breath is mixed in. Air from the subject's dead space would be sampled from the rising part of the waveform, where the exhaled pulmonary air pushes out the dead space air, which is air from the subject's mouth, trachea and bronchial tubes, which did not originate from the lungs themselves. Alveolar breath would be collected from the plateau of the waveform.

According to more preferred embodiments of the present invention, the rate of collection may be made dependent on a characteristic of the breath being measured at the input. Thus, collection rate could preferably be increased when changes of relevance are detected in the characteristic of the breath being measured, e.g. if the carbon dioxide concentration changes significantly, or in any of the other parameters being monitored in the subject or in the ambient.

According to another preferred embodiment of the present invention the collection system can include means to monitor the heart rate throughout the collection procedure, to allow the monitoring of changes in a metabolism rate of the subject that in particular, cause changes in the volume of carbon dioxide exhalation. As is known, the heart rate is one of the indicators of the overall metabolic rate of a subject. According to another preferred embodiment the CO₂ waveform is continuously analyzed to evaluate changes in the rate of carbon dioxide exhalation throughout the collection period.

For the measurement of VOC levels in the breath, additional requirements must be considered, because of the very small levels to be detected, typically of the order of microgram per liter concentrations, or even less. Some examples of such VOC breath tests are to detect the presence of acetone, which is present in the breath of some types of diabetic patients, or alcohol, or carbon monoxide, and others, as described, for instance in the articles entitled "Collection of Single Alveolar Exhaled Breath for Volatile Organic Compound Analysis" by J. D. Pleil et al., published in American Journal of Industrial Medicine, Vol. 28, pp. 109-121 (1995), and "Technological Development in Breath Microanalysis for Clinical Diagnosis" by Wu-Hsun Cheng et al., in Journal of Laboratory Clinical Medicine,

Vol. 133, pp. 218-228 (1999). The VOC detected in human alveolar breath may come from products of metabolism, which is the level being sought in the breath test, or it may come from inhaled ambient air, in which case the level is simply an indicator of the gas abundance in the background, and is of secondary interest. For this reason, it is generally necessary always to determinate the level of VOC in human expired air in comparison with background VOC levels.

Alternatively in some breath tests, such as the ammonia breath test for the detection of *Helicobacter pylori*, breath samples must be obtained from the body's dead space and not from the alveolar gas. Most of the ammonia generated in this test comes directly from the stomach and not by metabolic paths which result in its presence in exhaled breath from the lungs.

Different methods have been proposed to overcome the above-mentioned difficulties. One such method, for the performance of VOC breath tests, is the respiration of very pure air before the sampling. This, however, requires long preparation, is time consuming, unpractical for sequential measurement and requires a large volume of highly purified air, which is an expensive product. Alternatively, manually activated valves or simple pressure valves are used to attempt to isolate exhaled alveolar samples from other sources of gas, but these methods are inaccurate and unpractical for collecting gas from the inhaled air. For collecting dead space gases, catheters and aspirating devices have been proposed, but such devices are invasive, and may be inaccurate and impractical.

In order to solve the above mentioned problems, there is provided another preferred embodiment of the present invention, that accurately collects alveolar gas, environmental or dead space gas based on the carbon dioxide waveform information provided by a capnographic probe. This allows the VOC levels in the alveolar breath to be compared to ambient or dead space levels thus ensuring an accurate measurement. Alternatively a fast oxygen probe could replace the capnographic probe for similar purposes. In this case, a lower level of oxygen than the ambience level characterizes alveolar gas from breath.

Although the invention is described in this application for use with breath tests, it is to be understood that it is not meant to be limited to this such tests but may be advantageously used for collecting breath samples for any other long term clinical tests which use breath as the indicator.

In accordance with yet another preferred embodiment of the present invention, there is provided a system for collecting a plurality of samples of exhaled breath from a subject, comprising a breath conduit for conveying exhaled breath from the subject to the system, a plurality of sample containers for collection of the plurality of samples, a controller, and a sample distributor which directs different predetermined samples of the exhaled breath to different ones of the plurality of sample containers according to the controller.

In the above mentioned system, the controller may preferably cause the sample distributor to direct the samples at predetermined times, which may preferably be at fixed time intervals, or may preferably be determined by a characteristic of the exhaled breaths of the subject. This characteristic of the exhaled breaths may preferably be at least one of the carbon dioxide concentration, the oxygen concentration, the excess pressure, the temperature, the humidity, the flow rate and the sound of the exhaled breaths.

Alternatively and preferably, the predetermined times may be determined by at least one physiological characteristic of the subject, which could be any one or more of the subject's breath composition, breath rate, heart rate, blood pressure, gastric pH value and temperature, or any other suitable characteristic.

Alternatively and preferably, the predetermined times may be determined by an output from one or more of an implanted medical device, such as a drug delivery system, an ingested medical device, such as an endoscopic capsule, and an endoscopic medical device.

Furthermore, in any of the above-mentioned embodiments, the breath conduit may comprise a nasal or an oral/nasal cannula, or a breath tube.

There is further provided in accordance with yet another preferred embodiment of the present invention, a system for collecting a plurality of

samples of exhaled breath from a subject, comprising a breath conduit for conveying exhaled breath from the subject to the system, a breath analyzer for determining a characteristic of the exhaled breath, a valving system to collect at least part of the exhaled breath, the valving system being actuated according to the characteristic of the breath, a plurality of sample containers for collection of the plurality of samples, and a sample distributor for directing different predetermined samples of the at least part of the exhaled breath to different ones of the plurality of sample containers. The sample distributor may preferably be operated manually. Alternatively and preferably, the system may also comprise a controller operative to cause the sample distributor to direct the different predetermined samples to the different ones of the plurality of sample containers.

In the above mentioned systems, the breath analyzer may preferably be a capnographic analyzer, and the characteristic is then the carbon dioxide concentration of the breath. In such a case, the above-mentioned part of the exhaled breath is determined by the carbon dioxide concentration of the breath. According to more preferred embodiments, the part of the exhaled breath may be collected when the carbon dioxide concentration of the breath is at the plateau value of its waveform, such that alveolar air is sampled, or it may be collected when the carbon dioxide concentration of the breath is at the rising part of its waveform, such that dead space air is sampled, or it may be collected when the carbon dioxide concentration of the breath is at the baseline of its waveform, such that inhaled air is sampled.

Alternatively and preferably, the breath analyzer may be an oxygen content analyzer, and the characteristic is then the oxygen concentration of the breath.

In the last mentioned systems, the controller may preferably cause the sample distributor to direct the samples at predetermined times, which may preferably be at fixed time intervals, or may preferably be determined by a characteristic of the exhaled breaths of the subject. This characteristic of the exhaled breaths may preferably be at least one of the carbon dioxide

concentration, the oxygen concentration, the excess pressure, the temperature, the humidity, the flow rate and the sound of the exhaled breaths.

Alternatively and preferably, the predetermined times may be determined by at least one physiological characteristic of the subject, which could be the subject's breath composition, breath rate, heart rate, blood pressure, gastric pH value or temperature, or any other suitable characteristic.

Alternatively and preferably, the predetermined times may be determined by an output from one or more of an implanted medical device, such as a drug delivery system, an ingested medical device, such as an endoscopic capsule, and an endoscopic medical device.

In accordance with still another preferred embodiment of the present invention, there is provided a system for collecting a plurality of samples of exhaled breath from a subject, comprising a breath conduit for conveying exhaled breath from the subject to the system, a valving system to collect at least part of the exhaled breath, the valving system being actuated according to a physiological characteristic of the subject, a plurality of sample containers for collection of the plurality of samples, and a sample distributor for directing different predetermined samples of the at least part of the exhaled breath to different ones of the plurality of sample containers. The at least one physiological characteristic of the subject may preferably be any one or more of the subject's breath composition, breath rate, heart rate, blood pressure, gastric pH value, temperature, or any other suitable characteristic. Furthermore, the breath conduit may preferably comprise a nasal or an oral/nasal cannula, or a breath tube.

There is further provided in accordance with still another preferred embodiment of the present invention, a system for collecting a plurality of samples of exhaled breath from a subject, comprising a breath tube through which the subject provides exhaled breath by blowing, a pressure sensor for determining the pressure of the exhaled breath, a valving system for collecting at least one sample from at least part of the exhaled breath, the valving system being actuated according to the pressure of the exhaled breath, a plurality of sample

containers for collection of the plurality of samples, and a sample distributor for directing different predetermined samples of the at least part of the exhaled breath to different ones of the plurality of sample containers.

The sample distributor may preferably be operated manually. Alternatively and preferably, the system may also comprise a controller operative to cause the sample distributor to direct the different predetermined samples to the different ones of the plurality of sample containers. If the system includes a controller, the controller may preferably prompt the subject at predetermined times to provide exhaled breath by blowing. These predetermined times may be fixed time intervals, or they may be determined by a physiological characteristic of the subject, which could be any one or more of the subject's breath composition, breath rate, heart rate, blood pressure, gastric pH value or temperature, or any other suitable characteristic. Alternatively and preferably, the predetermined times may be determined by an output from one or more of an implanted medical device, such as a drug delivery system, an ingested medical device, such as an endoscopic capsule, and an endoscopic medical device.

In accordance with yet a further preferred embodiment of the present invention, there is also provided a system for collecting a plurality of samples of exhaled breath from a subject, comprising a breath tube through which the subject provides exhaled breath by blowing, a plurality of sample containers for collection of the plurality of samples, a one way check valve for directing the breath samples from the breath tube to the plurality of sample containers, and a sample distributor for directing different predetermined samples of the exhaled breath to different ones of the plurality of sample containers.

The sample distributor may preferably be operated manually. Alternatively and preferably, the system may also comprise a controller operative to cause the sample distributor to direct the different predetermined samples to the different ones of the plurality of sample containers. If the system includes a controller, the controller may preferably prompt the subject at predetermined times to provide exhaled breath by blowing. These predetermined times may be fixed time

intervals, or they may be determined by a physiological characteristic of the subject, which could be any one or more of the subject's breath composition, breath rate, heart rate, blood pressure, gastric pH value or temperature, or any other suitable characteristic. Alternatively and preferably, the predetermined times may be determined by an output from one or more of an implanted medical device, such as a drug delivery system, an ingested medical device, such as an endoscopic capsule, and an endoscopic medical device.

There is also provided in accordance with yet a further preferred embodiment of the present invention, a method for determining the concentration of a volatile organic compound in exhaled breath of a subject, comprising the steps of:

- (i) collecting in a container a first sample indicative of the ambient air inhaled by the subject,
- (ii) collecting in a second container a second sample of alveolar air in the exhaled breath of the subject,
- (iii) analyzing the first and second samples for the concentrations of the volatile organic compound, and
- (iv) comparing the concentration of the volatile organic compound in the first sample with that in the second sample.

The above-mentioned method may preferably also comprise the step of analyzing the exhaled breath by means of a capnographic probe, wherein the first sample of air is collected at the baseline of the waveform of the exhaled breath of the subject, and the second sample of air is collected from the plateau volume of the exhaled breath of the subject.

There is even further provided in accordance with another preferred embodiment of the present invention, a method of determining in a breath test of a subject, the volume of a species in the subject's exhaled breath over a period of interest, comprising the steps of:

- (i) providing a breath test apparatus comprising a probe at its input, such that the concentration of the species in the exhaled breath of the subject is continuously monitored,
- (ii) measuring the breathed volume rate of the species in the subject's exhaled breath as a function of the integrated concentration of the species, such that the relationship of breathed volume to measured concentration is known,
- (iii) integrating over the period of interest, the total exhaled concentration of the species determined by the probe, and
- (iv) converting the integrated concentration of the species to the absolute volume of the species by means of the relationship.

Furthermore, in accordance with yet another preferred embodiment of the present invention, there is provided a method of determining, in a breath test of a subject, the change in volume of a species in the subject's exhaled breath, comprising the steps of:

- (i) measuring a first concentration of the species in the exhaled breath of the subject by means of the breath test,
- (ii) measuring a second concentration of the species in the exhaled breath of the subject by means of the breath test,
- (iii) monitoring a physiological parameter of the subject related to the metabolic rate of the subject, for change in the parameter between the measuring of the first concentration and the second concentration, and
- (iv) adjusting the second concentration according to change determined in the physiological parameter, such that the second concentration measured is representative of the volume of the species in the subject's exhaled breath.

In the above-mentioned method, the physiological parameter of the subject may preferably be at least one of the pulse rate of the subject, the integrated area under a capnographic measurement of the subject's breath, and the breath flow rate of the subject.

There is also provided in accordance with a further preferred embodiment of the present invention, a system according to any of the above-described

embodiments and in which the sample containers contain a material which absorbs at least part of the exhaled breath of the subject. In such embodiments, the material may preferably releases the at least part of the exhaled breath of the subject under the influence of heat.

Furthermore, in accordance with yet more preferred embodiments of the present invention, in any of the systems described hereinabove, there may also be included an evacuated chamber in which the plurality of sample containers are located. In such a case, the sample containers should preferably be flexible bags.

Finally, in accordance with yet more preferred embodiments of the present invention, in any of the systems described hereinabove, the sample containers may have rigid walls and may preferably be evacuated before the commencement of the collection of the samples.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood and appreciated more fully from the following detailed description, taken in conjunction with the drawings in which:

Fig.1 is a schematic illustration of a breath collection system constructed and operative according to a first preferred embodiment of the present invention, for use with cannula breath collection;

Figs. 2A to 2C are schematic illustrations of breath collection systems constructed and operative according to other preferred embodiments of the present invention, and especially utilizable when the subject provides the samples by blowing into a breath tube, rather than using a cannula;

Fig. 3 is a schematic illustration of yet another preferred embodiment of the present invention, which is a simplified version of that shown in Fig. 2B using a check valve for directing the sample gas within the system;

Fig. 4 is a schematic illustration of a breath collection system, constructed and operative according to yet another preferred embodiment of the present

invention, in which the sample collection bags are contained in a vacuum chamber, thus obviating the need to provide a pump in the system;

Fig. 5 is a schematic illustration showing how breath samples are separately defined for collection from different sections of the respiratory wavefront, and by means of the breath collection system of Fig. 1, are allocated to different collection containers;

Fig. 6 is a schematic illustration of a breath collection system, constructed and operative according to yet another preferred embodiment of the present invention, in which the sample collection bags shown in the systems of the above drawings are replaced by adsorbent traps for absorbing the VOC content of the exhaled breath; and

Figs. 7A and 7B are schematic illustrations of a subject wearing a complete breath collection system as shown schematically in Fig. 1, according to two different preferred embodiments.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Reference is now made to Fig. 1, which is a schematic illustration of a breath collection system constructed and operative according to a first preferred embodiment of the present invention. The subject's exhaled breath is collected at the breath collection port 10, preferably by means of an oral, a nasal or an oral/nasal cannula, as is known in the art, or by means of a breath tube into which the subject blows a breath. After entering the system, the breath sample passes into the breath sensor 12, which can be any one of a number of different types. According to one embodiment of the present invention, the breath sensor 10 incorporates a capnographic probe, operative to determine the carbon dioxide concentration in the breath as a function of time. An electronic signal proportional to the temporal carbon dioxide concentration of the breath is input to the system controller 14.

After exiting the breath sensor, the breath sample enters a pump 16. When a cannula is used to collect the exhaled breath, this pump ensures the inputting of the breath sample from the subject by means of its suction effect, and its continued motion through the rest of the system. In cases when a breathing tube is used for collecting the sample, the need for a pump is obviated.

After exiting the pump 16, the breath sample is preferably directed to a three way solenoid valve 18 whose flow position is controlled by means of a signal obtained from the system controller 14. The two alternate positions of the solenoid either pass the breath sample into the sample distributor unit 20, or discard the sample by ejecting it into the air 22. According to a first preferred embodiment, the controller 14 which provides the solenoid control signal, is programmed to determine when the subject's breaths are to be collected and when they are to be rejected, according to the predetermined test procedure, as described below.

According to a second preferred embodiment, the solenoid valve 18 is additionally or alternatively controlled so that only those parts of the breath samples are collected, where the carbon dioxide concentration is above a predefined level. Those parts where the carbon dioxide concentration is below that predefined level are rejected. Such a division can be derived from the output signal obtained from the capnographic breath sensor 12, and the controller can be adjusted to select or reject any predefined part of the breath waveform, according to the carbon dioxide level instantaneously detected, as further explained in the above-mentioned International Publication No. WO 99/14576. Alternatively and preferably, the solenoid valve 18 is controlled to collect only those parts of the breath where the carbon dioxide concentration is below a predefined level, or alternatively, to collect any predefined part of the waveform. According to further preferred embodiments of the present invention, the breath sensor need not specifically be a capnographic detector, but can be a detector of another gas such as oxygen, or ammonia, depending on the particulars of the test with which the breath collection system is to be used, or even a combination of a capnograph

with another sensor. Furthermore, sensors of pressure, flow, acoustic noise, temperature and humidity may also preferably be used to detect exhaled breaths.

According to another preferred embodiment of the invention, the system collects samples in response to a signal related to an environmental effect, such as the presence of a hazardous gas in the air, as preferably detected by a hazardous gas detector.

The sample distributor 20 is operable to distribute separate breath samples or, according to the solenoid valve programming, parts of separate breath samples, to a number of individual sample containers 24. The timing of the distribution is determined by the controller 14. According to one preferred embodiment of the present invention, samples are collected at regular timed intervals, according to the predetermined requirements of the test. According to another preferred embodiment, samples are collected at times according to predetermined factors derived from signals input to the controller from physiological stimuli related either to the breaths themselves, such as, for instance, their end-tidal carbon dioxide content, or the breath rate, either of which would be obtained from the capnographic probe 12, or to physiological signals 26 other than those from the breaths themselves, some examples being the subject's pulse rate, breath flow rate, blood pressure, or temperature, as mentioned above.

According to yet more preferred embodiments of the present invention, the gas collection system could be activated by means of a signal generated by an implantable, introduci ble or ingestible medical device, such as a drug delivery system, a pH monitoring system, or by means of an endoscope or an endoscopic capsule probe. Thus, for instance, according to one preferred embodiment of these external activating signals, a drug dispensing pump can be used to dispense a therapeutic or a diagnostic drug at a designated point in the subject's body, and the dispensing time signal can be made to trigger breath test collection, such that the effectiveness of the drug can be verified by means of the breath test on the samples collected accordingly. Similarly, a signal can be provided by an endoscopic imaging capsule, such as that described in the article "Localization of

a Wireless Capsule Endoscope in the G-I Tract" by D. Fischer et al, published in Gastro-Intestinal Endoscopy, Vol. 53, p. AB126 (2001). In such an application, the probe can be used to define the position of a test meal in the G-I tract, so that the breaths can be collected in correlation with the known position of the meal. Such an application can be advantageously utilized in performing the breath test for determining bacterial overgrowth. Likewise, a pH monitoring system could provide a signal to the system to collect a breath test sample or samples when the intragastric pH reaches a predetermined value.

The sample distributor 20 preferably comprises a multi-output solenoid valve, whose input can be switched to any of an array of output lines by means of electrical control signals, as is known in the art. Alternatively and preferably, an array of individual solenoid valves can be provided, connected together on the common input side and each feeding a separate output line to a single sample container. Each container is filled by opening its associated individual solenoid valve, until the required number of breaths to fill it is collected. The controller determines when the bag is full from a calculation performed using the known flow rate which is determined by the pump, the fluid resistance of the system, and the length and duration of the breaths. The valves can preferably be electro-mechanically or pneumatically operated.

The collection containers are preferably in the form of gas-tight bags, which are initially flat at the beginning of the test, and each of which is sequentially filled by the inflow of the breath sample directed to that container. The collection containers are preferably arranged in a separate unit, easily detachable from the rest of the breath collection system, such that once the required number of collection containers have been filled at the end of the collection period, this separate unit can be detached and taken to the gas analyzer system for analysis. Alternatively and preferably, each of the separate collection containers can be detached from the system and taken for analysis.

Reference is now made to Figs. 2A to 2C, which are schematic illustrations of breath collection systems constructed and operative according to

more preferred embodiments of the present invention. These embodiments differ from that shown in Fig. 1 in several respects. Firstly, sample collection from the subject is not performed independent of subject intervention by means of a nasal or nasal/oral cannula, but rather by means of a breath tube into which the subject actively blows 30. The subject is preferably prompted to provide the breath sample by means of a prompting signal 32, such as an aural tone, or a flashing light signal, provided at the correct time by the controller 14. This can either be at given time intervals predetermined according to the test being performed, or it could be in response to a physiological stimulus arising from another source 26, including a capnographic sensor, for use with breath tests where a specific physiological parameter value mandates that a breath sample be collected for testing.

Since the act of blowing a breath into the breath tube generates a positive pressure at the system input, according to these embodiments there is no need for a pump to collect and drive the breath samples through the system, as shown in the previous embodiment of Fig. 1. According to a first version of this embodiment, shown in Fig. 2A, the breath from the input tube is passed into a pressure sensor 34, whose output signal is processed by the controller 14, and which is operable to switch the solenoid valve 18 to collect or discard part of the breath sample. In this way, only those parts of breath samples are collected which arise from a pulmonary output pressure above a predetermined value. According to a second simpler version of this embodiment, shown in Fig. 2B, the input breath sample is passed directly to the sample distributor 20, where it is sent to its predetermined collection container, as described in the embodiment shown in Fig. 1. According to a third version, a capnography probe may detect the parts of the exhaled waveform of interest. In this third embodiment, there is no waveform comparable to that of the conventional nasal sampling case, but the capnographic probe can be used to accurately differentiate that part of the breath originating from dead space at the beginning of the subject's blowing, from the alveolar breath.

Since the embodiments shown in Figs. 2A and 2B are dependent on the subject's co-operation in providing the breath sample when prompted, the system can be even further simplified, according to a further preferred embodiment of the invention, shown schematically in Fig. 2C, by having the subject also fulfil the distribution function. This can be done by providing a prompt 32 to the subject to switch from one sample container to the next as each breath sampling prompt is received from the controller 14, by means of a manually operated sample distributor 33. Alternatively, the subject can be prompted to switch to the next container after providing each breath sample or set of breath samples for each sample container. This embodiment thus simplifies the construction of the system by making the sample distributor manually operated 33.

Reference is now made to Fig. 3, which is a schematic illustration of a breath collection system constructed and operative according to yet another preferred embodiment of the present invention. This embodiment, like that shown in Fig. 2, utilizes a prompt signal to instruct the subject when the time has come to blow into the system to provide breath samples. However, the system is simpler than that shown in Fig. 2, in that essentially all of the breath blown out by the subject is passed to the sample distributor for collection by one or other of the sample containers. A one-way check valve 40, which opens at a certain predefined pressure, is provided to ensure that breath can only flow from the subject into the sample distributor, and not in reverse. This ensures the authenticity of the breath samples collected. The manually operated sample distributor 33 shown in Fig. 2C can also be advantageously used in this embodiment to further simplify the system.

Reference is now made to Fig. 4, which is a schematic illustration of a breath collection system, constructed and operative according to yet another preferred embodiment of the present invention. This embodiment is similar to that shown in Fig. 1, in that the use is made of a cannula to collect the exhaled breath and a breath sensor and solenoid valve to determine which part or parts of each breath to collect. However, in the embodiment of Fig. 4, there is shown a

special embodiment of the collection container system, which obviates the need to provide a pump in the breath collection system. The collection containers 24 are all accommodated within a gas-tight outer chamber 50 which is preferably pumped to a vacuum before the start of the test. The presence of the vacuum ensures that when the solenoid valve and the sample distributor valve to a particular sample container bag are open, the container bag will fill up with a breath sample, or part of a breath sample, by drawing in the subject's breath from the cannula under the effect of the vacuum acting on the container bag's outer surface. Alternatively and preferably, use can be made of vacutainersTM connected directly to the distribution tubes of the sample distributor, which fill up under the influence of the vacuum within the individual rigid containers.

In all of the above described embodiments of the present invention, it is important that the tubing from the exit of the solenoid valve 18 all the way to the sample container is as thin as possible, such that there is a minimal amount of residual gas in these tubes before the commencement of the test. In this way, there is minimal dilution of the collected sample by this residual gas. In this connection, it is important to note that the current commercially available vacutainersTM, as used for blood collection, are not of sufficiently large volume to ensure this condition, and that this embodiment therefore requires the provision of rigid evacuated containers of sufficiently large volume.

Though each of the above-mentioned embodiments have been described as having specific features, it is to be understood that these features can be interchanged, where relevant, between the various embodiments, without departing from the scope of the present invention. Thus for example, the use of a breath sensor, though only shown in the embodiments of Figs. 1 and 4, could also be used in the embodiments of Figs. 2, though its advantage would be reduced when the subject provides the samples by blowing. Similarly, a manually operated sample distributor could be utilized in any of the embodiments shown.

Reference is now made to Fig. 5, which is a schematic representation of a breath waveform, showing the various parts of the waveform from which a

capnographically controlled breath selector can select those parts required for a VOC breath test. The air sampled from the baseline region 60 is representative of the air from the environment, since in this region, the subject is inhaling, and virtually none of the subject's pulmonary breath is mixed in. Air from the subject's dead space is sampled from the rising part of the waveform 62, where the exhaled pulmonary air pushes out the dead space air, which is air from the subject's mouth, trachea and bronchial tubes, which did not originate from the lungs themselves. Alveolar breath is collected from the plateau 64 of the waveform.

Furthermore, Fig. 5 can be used to illustrate another preferred embodiment of the present invention, wherein the carbon dioxide waveform is constantly analyzed to evaluate changes in the rate of carbon dioxide exhalation throughout the collection period, and to determine the total exhaled volume of carbon dioxide. Such methods for the determination of the total exhaled volume of carbon dioxide may be used advantageously, according to further preferred embodiments of the present invention, when performing breath tests of the type which require absolute knowledge of the volume of labeled molecules exhaled. Examples of such breath tests are those for determining liver function or pancreatic function. In such tests, a known number of labeled molecules of the substance to be metabolized is ingested by the patient, and the breath test must determine at various times during the test, the absolute number of such exhaled molecules resulting from the metabolic pathways through the organ being tested. The results of capnographic measurements provide the concentration of carbon dioxide in the subject's exhaled breath. Likewise, the breath test measurements generally provide the ratio of isotope concentrations in the exhaled breaths. In order to convert concentrations into the total volume of carbon dioxide exhaled during any period, the relationship between the results of the capnograph concentration measurements and the absolute breathed volume of carbon dioxide must be determined.

In other breath tests, it is not the absolute volume that is required to be determined, but the change in absolute volume as the test proceeds. Since the volume is not necessarily directly related to the concentration measured by the breath test, prior art breath tests do not always provide accurate results for such tests. Thus, for example, if the metabolic rate of the subject changes, the concentrations measured in the breath test may be unchanged, while the exhaled volume may have changed significantly.

According to presently accepted procedures, use is usually made of standard tables or expressions, known as the BSA calculations, to determine the exhaled carbon dioxide volume expected from the known weight and height of the subject. Such assumed volumes can be in error if the overall metabolic rate of the subject is abnormal because of other factors, such as illness, genetic or statistical variations. Furthermore, as mentioned above, changes in metabolic rate can occur because of temporary circumstances, and in such cases, the use of BSA expressions may result in inaccuracies. The exhaled volume of carbon dioxide can be accurately measured by means of specific carbon dioxide absorbing traps, or by calorimetric measurements, but such methods generally take time and are complicated to execute, in comparison with a simple breath test.

The above described methods and apparatus may be advantageously used, according to another preferred method of the present invention, to estimate the absolute carbon dioxide exhaled volume at any time during the duration of the test, without unnecessarily complicating or significantly lengthening the breath test in progress. According to this preferred method, the exhaled volume of carbon dioxide is measured for a short period by means of one of the known accurate method, such as a calorimetric method, or an integrated flow measurement method. Once this base measurement has been obtained from the subject, the regular breath test is commenced, according to a first preferred embodiment, using a capnographic probe to provide waveform data such as is shown in Fig. 5. The area under a series of waveforms is integrated over the period of the breath collection, and the total volume of carbon dioxide exhaled is

assumed to be proportional to this integrated area. A constant carbon dioxide volume is indicative of a constant metabolic rate in the subject and the volume of carbon dioxide over any period is then assumed to be proportional to the integral under the waveform plot correlated with the absolute initial measurement of exhaled carbon dioxide volume performed at the start of the test. This means that a constant volume of exhaled breath is assumed throughout the test. If the waveforms show a change in carbon dioxide concentration, then the assumed absolute carbon dioxide volume is adjusted according to the change in the concentration shown. The calibration of concentration against volume may be performed before the test, as described above, or at any time during or after the test.

Alternatively and preferably, the total carbon dioxide volume can be calculated by utilizing the initially measured absolute volume rate, and adjusting this rate according to other indicators of the general metabolic rate of the subject, such as the subject's pulse rate, or from measurement of the flow rate of the breaths, or more simply, from a measure of the pressure differential generated by this flow across a passage of known resistance to the fluid flow. However, for typical flow rates generated during breath tests on human subjects, it is found that the pressure differential which needs to be measured is of the order of only 2 mbar, such that although a pressure measurement is generally simpler to perform than a flow measurement, the very small magnitude of the pressure differential may complicate the measurement.

Furthermore, if it is the changes in exhaled volume that is the parameter of interest in the breath test, then according to other preferred embodiments of the present invention, the results of the breath test can be adjusted for changes in comparative exhaled volume according to any one, or a combination of more than one, of the above described indicators of metabolic rate, such as capnographically measured carbon dioxide integrated volume, or pulse rate, or breath flow rate.

Furthermore, the pulse rate can preferably be used to determine the correct or the most advantageous time to collect breath samples, since a steady pulse rate is indicative of the lack of interference to the subject's metabolism.

Reference is now made to Fig. 6, which is a schematic illustration of a system according to another preferred embodiment of the present invention, in which the sample collection bags are replaced by absorbent traps for collecting VOC's or the specific gas intended to be measured. For VOC measurements, such traps could preferably contain activated charcoal, carbon black, molecular sieves, polymers, or any other suitable VOC absorbing material. For isotopic carbon dioxide measurements, soda lime or lithium hydroxide could preferably be used. Such absorbing materials are characterized by absorbing the specified compound at room temperature and releasing it while heated to temperatures of between 100°C and 450°C , according to the material. The volumes of collected gas samples are preferably measured by means of a flow meter or similar device, as described above, and are recorded for further analysis together with the carbon dioxide concentrations obtained from the capnographic probe. Alternatively, the volumes of gas to be delivered to the absorption traps, could be measured by means of an intermediate chamber of given volume. This enables equal volumes of gas to be passed to the absorption traps, so that the volumes of gas trapped are normalized to each other. The carbon dioxide concentration of each sample can be recorded for further analysis. The absorption traps can be heated to release the absorbed gases for measurement. A heating device, such as a resistor, could be included in the sample container, connected to an external power source, such that the gas contained in each trap is selectively and sequentially released by means of activation of the heater and the solenoid valves. Alternatively this gas collection and release system could provided as an accessory for use with other gas collection systems, or can be implemented using standard laboratory equipment as described in the prior art. Gas measurement of VOC concentrations can preferably be performed by subtracting the concentration of VOC found in

the ambient air from that found in the alveolar air, as described, for instance, in the above-mentioned articles by J. D. Pleil et al., and by Wu-Hsun Cheng et al.

Reference is now made to Figs. 7A and 7B, which schematically illustrate a subject using a breath collection system 70 according to two preferred embodiments of the breath collection system shown in Fig. 1. The system is a portable embodiment, easily carried by the subject, for example on the subject's belt as shown in Fig. 7A, or in a back-pack, as shown in Fig. 7B, or in a small hand-carried bag.

The breath samples are collected from the subject in the conventional manner by means of a nasal cannula 72, and are conveyed to the collection system 70 by means of a thin cannula tube 74. These embodiments thus enable the subject to continue the performance of the breath test, even for long periods of time, while carrying on his/her regular routine. In this respect, these preferred embodiments of the present invention may be regarded as being the capnographic equivalents of the well-known Holter monitors used for monitoring cardiac activity while the subject is carrying on his regular routine.

It is appreciated by persons skilled in the art that the present invention is not limited by what has been particularly shown and described hereinabove. Rather the scope of the present invention includes both combinations and subcombinations of various features described hereinabove as well as variations and modifications thereto which would occur to a person of skill in the art upon reading the above description and which are not in the prior art.

CLAIMS

We claim:

1. A system for collecting a plurality of samples of exhaled breath from a subject, comprising:

a breath conduit for conveying exhaled breath from said subject to said system;

a plurality of sample containers for collection of said plurality of samples;

a controller; and

a sample distributor which directs different predetermined samples of said exhaled breath to different ones of said plurality of sample containers according to said controller.

2. A system according to claim 1 wherein said controller causes said sample distributor to direct said samples at predetermined times.

3. A system according to claim 2 wherein said predetermined times are at fixed time intervals.

4. A system according to claim 2 wherein said predetermined times are determined by a characteristic of said exhaled breaths of said subject.

5. A system according to claim 4 wherein said characteristic of said exhaled breaths is at least one of the carbon dioxide concentration, the oxygen concentration, the excess pressure, the temperature, the humidity, the flow rate and the sound of said exhaled breaths.

6. A system according to claim 2 wherein said predetermined times are determined by at least one physiological characteristic of said subject.

7. A system according to claim 6 wherein said at least one physiological characteristic of said subject is selected from a group consisting of said subject's breath composition, breath rate, heart rate, blood pressure, gastric pH value and temperature.
8. A system according to claim 2 wherein said predetermined times are determined by an output from at least one of an implanted medical device, an ingested medical device, and an endoscopic medical device.
9. A system according to claim 8 wherein said implanted medical device is a drug delivery system.
10. A system according to claim 8 wherein said ingested medical device is an endoscopic capsule.
11. A system according to any of claims 1 to 10 and wherein said breath conduit comprises a nasal or oral/nasal cannula.
12. A system according to any of claims 1 to 10 and wherein said breath conduit comprises a breath tube.
13. A system for collecting a plurality of samples of exhaled breath from a subject, comprising:
 - a breath conduit for conveying exhaled breath from said subject to said system;
 - a breath analyzer for determining a characteristic of said exhaled breath;
 - a valving system to collect at least part of said exhaled breath, said valving system being actuated according to said characteristic of said breath;

a plurality of sample containers for collection of said plurality of samples; and

a sample distributor for directing different predetermined samples of said at least part of said exhaled breath to different ones of said plurality of sample containers.

14. A system according to claim 13 and wherein said sample distributor is operated manually.

15. A system according to claim 13 and also comprising a controller causing said sample distributor to direct said different predetermined samples to said different ones of said plurality of sample containers.

16. A system according to any of claims 13 and 15 wherein said breath analyzer is a capnographic analyzer, and said characteristic is the carbon dioxide concentration of said breath.

17. A system according to claim 16 wherein said part of said exhaled breath is determined by said carbon dioxide concentration of said breath.

18. A system according to claim 17 wherein said part of said exhaled breath is collected when said carbon dioxide concentration of said breath is at the plateau value of its waveform, such that alveolar air is sampled.

19. A system according to claim 17 wherein said part of said exhaled breath is collected when said carbon dioxide concentration of said breath is at the rising part of its waveform, such that dead space air is sampled.

20. A system according to claim 17 wherein said part of said exhaled breath is collected when said carbon dioxide concentration of said breath is at the baseline of its waveform, such that inhaled air is sampled.

21. A system according to any of claims 13 to 15 wherein said breath analyzer is an oxygen content analyzer, and said characteristic is the oxygen concentration of said breath.

22. A system according to claim 15 wherein said controller causes said sample distributor to direct said samples at predetermined times.

23. A system according to claim 22 wherein said predetermined times are at fixed time intervals.

24. A system according to claim 22 wherein said predetermined times are determined by a characteristic of said exhaled breaths of said subject.

25. A system according to claim 22 wherein said characteristic of said exhaled breaths is at least one of the carbon dioxide concentration, the oxygen concentration, the excess pressure, the temperature, the humidity, the flow rate and the sound of said exhaled breaths.

26. A system according to claim 22 wherein said predetermined times are determined by a physiological characteristic of said subject.

27. A system according to claim 26 wherein said at least one physiological characteristic of said subject is selected from a group consisting of said subject's breath composition, breath rate, heart rate, blood pressure, gastric pH value and temperature.

28. A system according to claim 22 wherein said predetermined times are determined by a signal from at least one of an implanted medical device, an ingested medical device, and an endoscopic medical device.

29. A system according to claim 28 wherein said implanted medical device is a drug delivery system.

30. A system according to claim 28 wherein said ingested medical device is an endoscopic capsule.

31. A system for collecting a plurality of samples of exhaled breath from a subject, comprising:

a breath conduit for conveying exhaled breath from said subject to said system;

a valving system to collect at least part of said exhaled breath, said valving system being actuated according to a physiological characteristic of said subject;

a plurality of sample containers for collection of said plurality of samples; and

a sample distributor for directing different predetermined samples of said at least part of said exhaled breath to different ones of said plurality of sample containers.

32. A system according to claim 31 wherein said at least one physiological characteristic of said subject is selected from a group consisting of said subject's breath composition, breath rate, heart rate, blood pressure, gastric pH value and temperature.

33. A system according to any of claims 13 to 32 and wherein said breath conduit comprises a cannula.

34. A system according to any of claims 13 to 32 and wherein said breath conduit comprises a breath tube.

35. A system for collecting a plurality of samples of exhaled breath from a subject, comprising:

a breath tube through which said subject provides exhaled breath by blowing;

a pressure sensor for determining the pressure of said exhaled breath;

a valving system for collecting at least one sample from at least part of said exhaled breath, said valving system being actuated according to said pressure of said exhaled breath;

a plurality of sample containers for collection of said plurality of samples; and

a sample distributor for directing different predetermined samples of said at least part of said exhaled breath to different ones of said plurality of sample containers.

36. A system according to claim 35 and wherein said sample distributor is operated manually.

37. A system according to claim 35 and also comprising a controller causing said sample distributor to direct said different predetermined samples to said different ones of said plurality of sample containers.

38. A system according to claim 37 and wherein said controller prompts said subject at predetermined times to provide exhaled breath by blowing.

39. A system according to claim 38 wherein said predetermined times are at fixed time intervals.

40. A system according to claim 38 wherein said predetermined times are determined by a physiological characteristic of said subject.

41. A system according to claim 40 wherein said at least one physiological characteristic of said subject is selected from a group consisting of said subject's breath composition, breath rate, heart rate, blood pressure, gastric pH value and temperature.
42. A system according to claim 38 wherein said predetermined times are determined by an output from at least one of an implanted medical device, an ingested medical device, and an endoscopic medical device.
43. A system for collecting a plurality of samples of exhaled breath from a subject, comprising:
- a breath tube through which said subject provides exhaled breath by blowing;
 - a plurality of sample containers for collection of said plurality of samples;
 - a one way check valve for directing said breath samples from said breath tube to said plurality of sample containers; and
 - a sample distributor for directing different predetermined samples of said exhaled breath to different ones of said plurality of sample containers.
44. A system according to claim 43 and wherein said sample distributor is operated manually.
45. A system according to claim 43 and also comprising a controller causing said sample distributor to direct said different predetermined samples to said different ones of said plurality of sample containers.
46. A system according to claim 43 and wherein said controller prompts said subject at predetermined times to provide exhaled breath by blowing.

47. A system according to claim 46 wherein said predetermined times are at fixed time intervals.

48. A system according to claim 46 wherein said predetermined times are determined by a physiological characteristic of said subject.

49. A system according to claim 48 wherein said at least one physiological characteristic of said subject is selected from a group consisting of said subject's breath composition, breath rate, heart rate, blood pressure, gastric pH value and temperature.

50. A system according to claim 46 wherein said predetermined times are determined by an output from at least one of an implanted medical device, an ingested medical device, and an endoscopic medical device.

51. A method for determining the concentration of a volatile organic compound in exhaled breath of a subject, comprising the steps of:

collecting in a container a first sample indicative of the ambient air inhaled by said subject;

collecting in a second container a second sample of alveolar air in said exhaled breath of said subject;

analyzing said first and second samples for the concentrations of said volatile organic compound; and

comparing the concentration of said volatile organic compound in said first sample with that in said second sample.

52. The method of claim 51 and also comprising the step of analyzing said exhaled breath by means of a capnographic probe, and wherein said first sample of air is collected at the baseline of the waveform of said exhaled breath of said subject, and said second sample of air is collected from the plateau volume of said exhaled breath of said subject.

53. A method of determining, in a breath test of a subject, the volume of a species in said subject's exhaled breath over a period of interest, comprising the steps of:

providing a breath test apparatus comprising a probe at its input, such that the concentration of said species in the exhaled breath of said subject is continuously monitored;

measuring the breathed volume rate of said species in said subject's exhaled breath as a function of the integrated concentration of said species, such that the relationship of breathed volume to measured concentration is known;

integrating over said period of interest, the total exhaled concentration of said species determined by said probe; and

converting said integrated concentration of said species to the absolute volume of said species by means of said relationship.

54. A method of determining, in a breath test of a subject, the change in volume of a species in said subject's exhaled breath, comprising the steps of:

measuring a first concentration of said species in the exhaled breath of said subject by means of said breath test;

measuring a second concentration of said species in the exhaled breath of said subject by means of said breath test;

monitoring a physiological parameter of said subject related to the metabolic rate of said subject, for change in said parameter between the measuring of said first concentration and said second concentration; and

adjusting said second concentration according to change determined in said physiological parameter, such that said second concentration measured is representative of the volume of said species in said subject's exhaled breath.

55. The method of claim 54, wherein said physiological parameter of said subject is at least one of the pulse rate of said subject, the integrated area under a capnographic measurement of said subject's breath, and the breath flow rate of said subject.

56. A system according to any of the previous claims and wherein said sample containers contain a material which absorbs at least part of said exhaled breath of said subject.

57. A system according to claim 56 and wherein said material releases said at least part of said exhaled breath of said subject under the influence of heat.

58. A system according to any of the previous claims 1 to 55, and also comprising an evacuated chamber in which said plurality of sample containers are located.

59. A system according to claim 58 and wherein said sample containers are flexible bags.

60. A system according to any of the previous claims 1 to 55, and wherein said sample containers have rigid walls and are evacuated before the commencement of said collection of said samples.

For the applicants:

Sanford T. Colb & Co.
Advocates and Patent Attorneys
C: 43978

FIG. 1

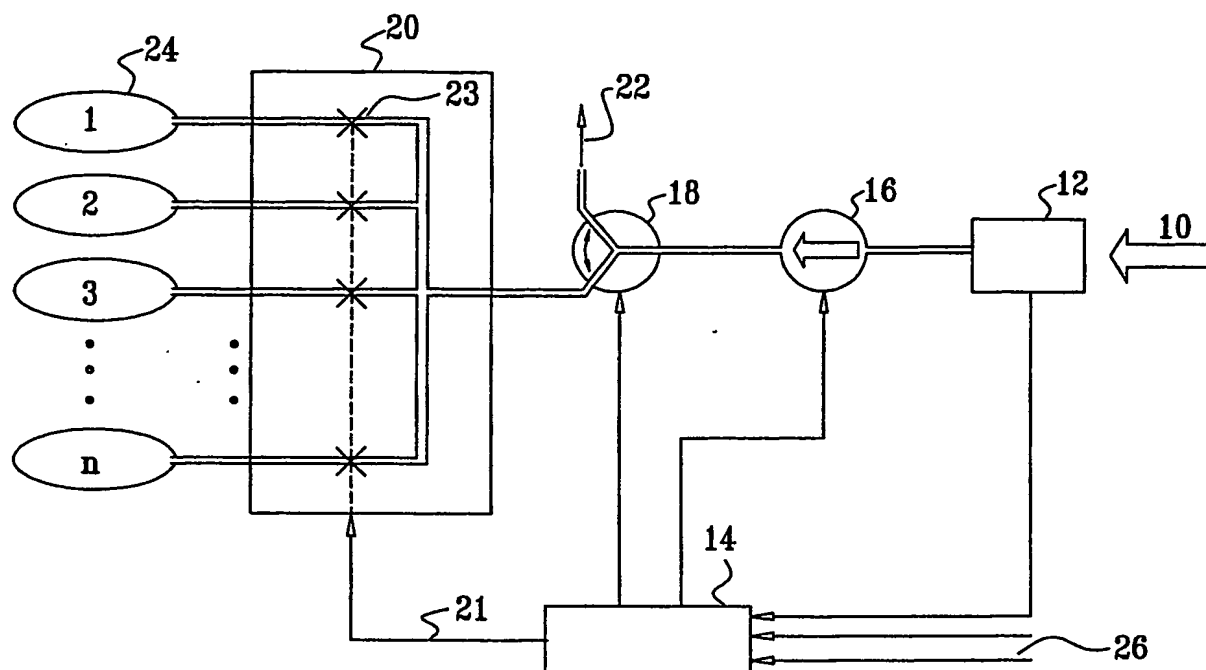


FIG. 2A

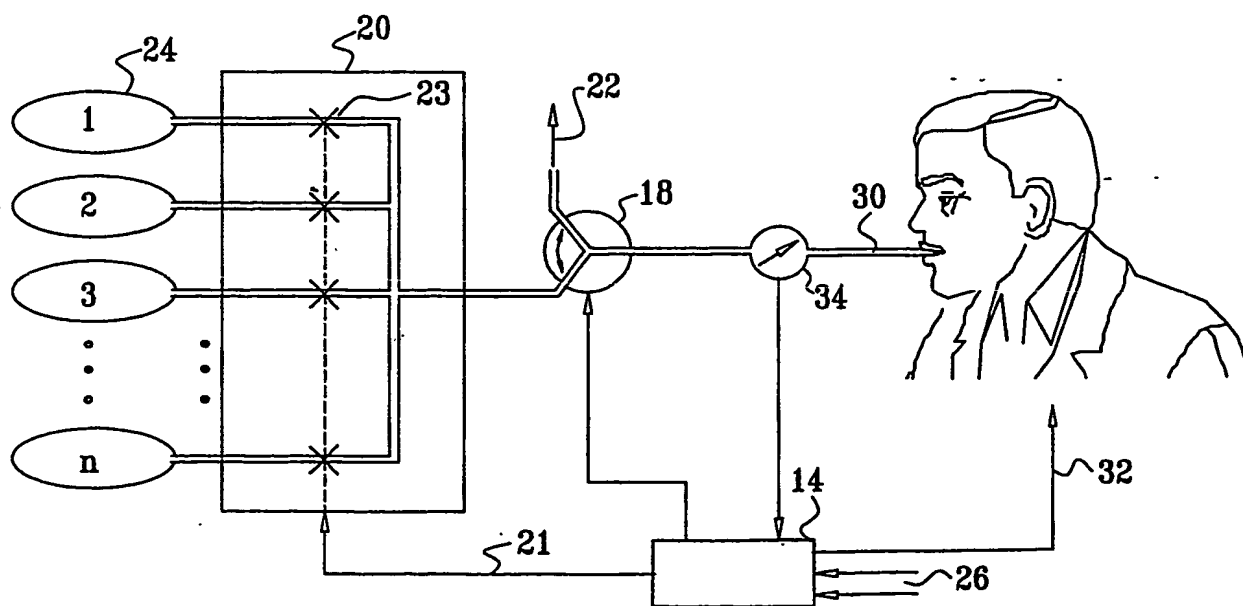


FIG. 2B

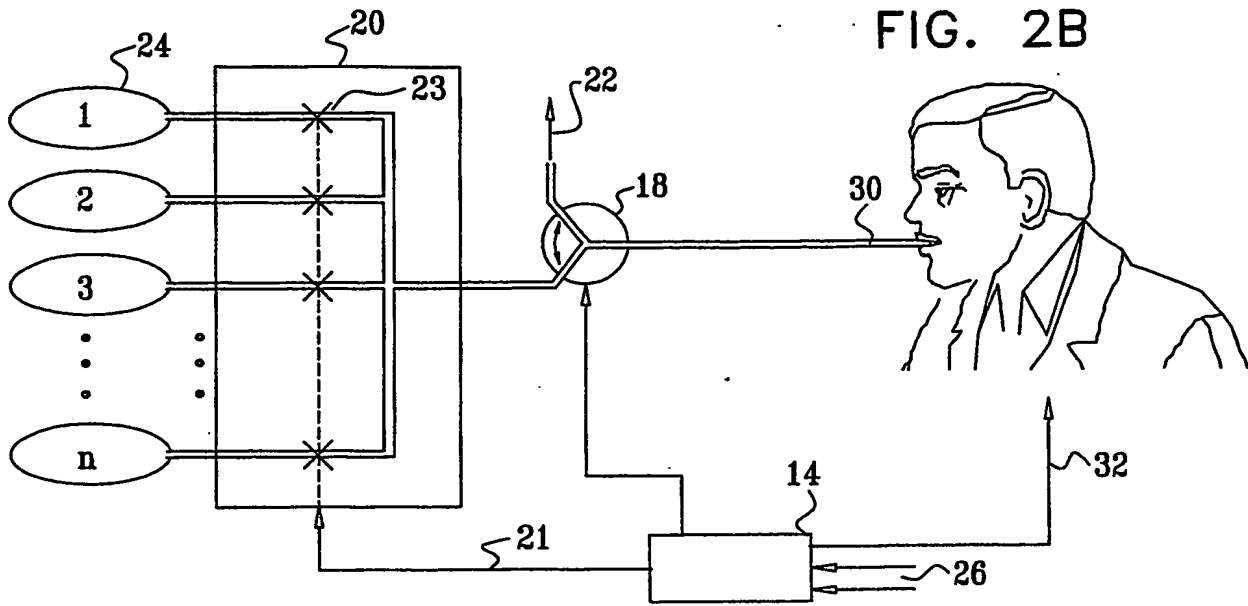


FIG. 2C

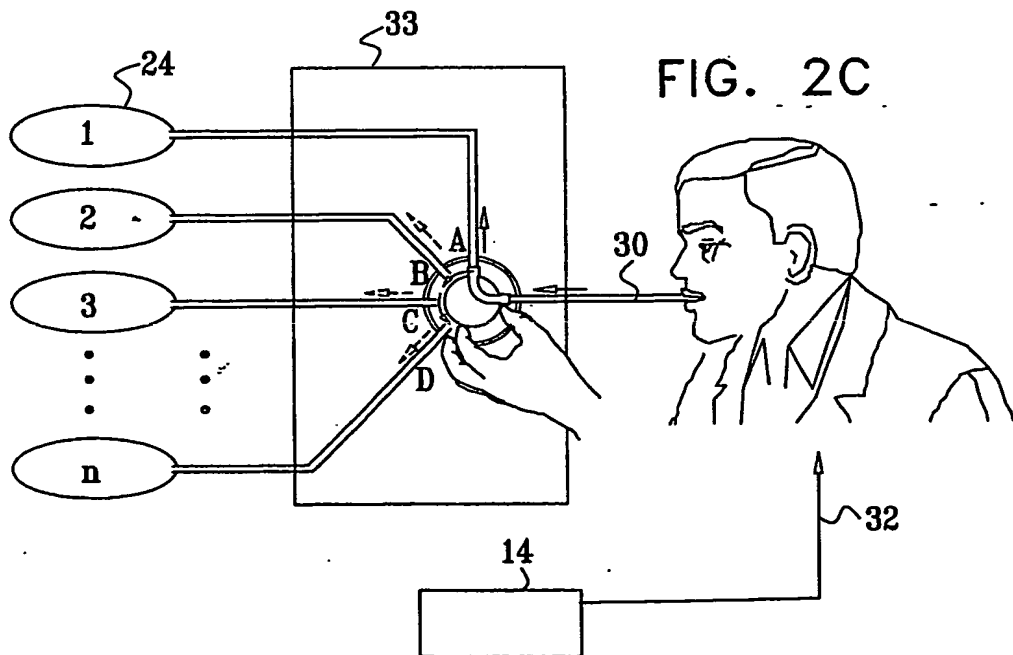


FIG. 3

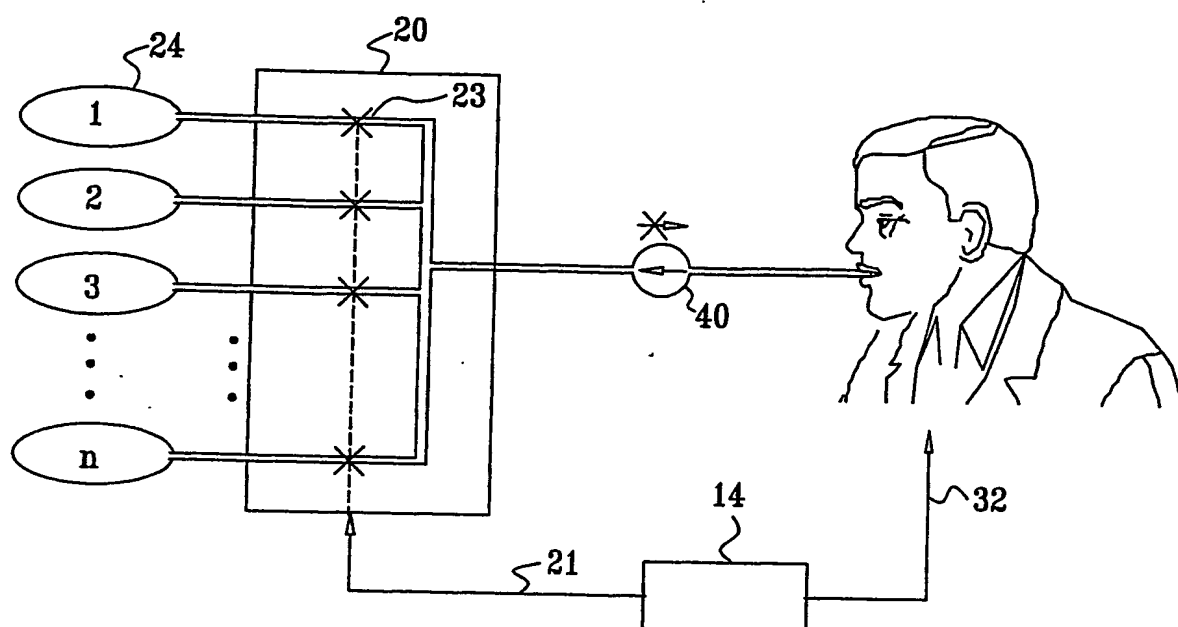


FIG. 4

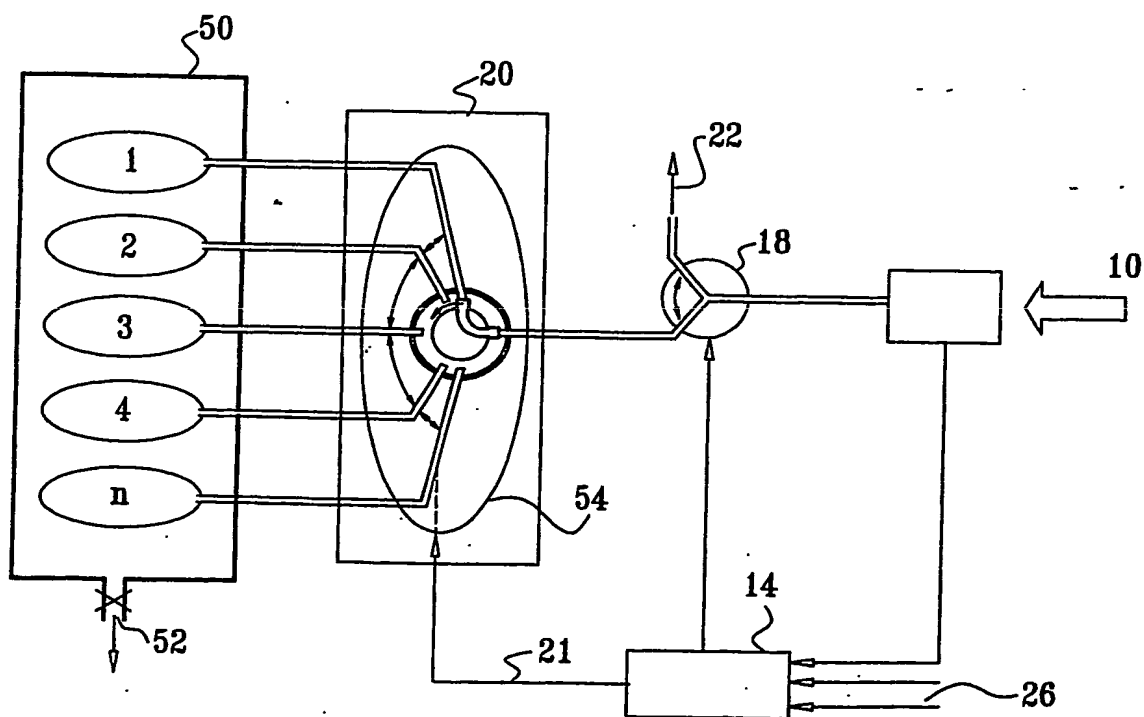


FIG. 5

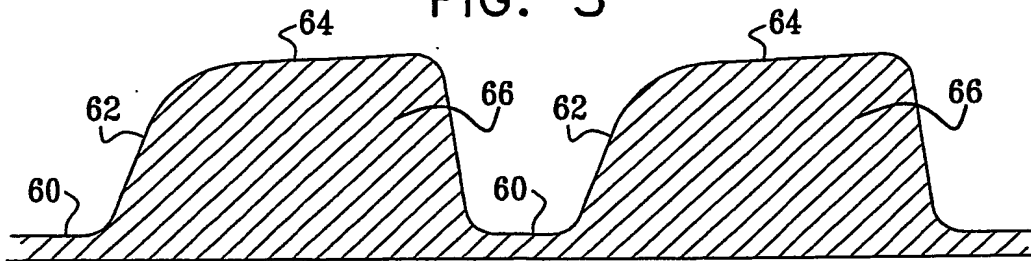


FIG. 6

